



**MODERN HOME
NEEDS
MODERN SOLUTION**

SOLVE WITH

PROMO plus

SPECIAL FEATURES

- Exceptional Whiteness
- Enhanced adhesion and durability
- True tone of color
- Zero VOC mixed
- Zero to Low maintenance and longer life span



Website: www.appaints.com

Call Us: 7980845099/6290583535
Email : contact@appaints.com

Giving Wall A New Life



WHY DO YOU CHOOSE PROMO PLUS -WALL PUTTY ?

PROMO PLUS -White Cement Base Wall Putty is a powder-based combination of ultra-fine cement, flexible powder polymer, cellulose, colors, and a variety of additional ingredients. It is used on both the outside and inside of walls to provide a smooth, undulating surface. PROMO PLUS wall putty provides a smooth surface, resists cracks, flaking, peeling, and dampness, and gives exceptional coverage for both interior and outdoor walls



Water Resistant



Eco Friendly



Smooth Finish



strong bond with wall



ABOUT US

We are the Premium Manufacturer of White Cement Base Wall Putty. 2012 was the year. A group of seasoned experts with extensive knowledge and experience in the construction sector made the critical choice to produce and offer Premium quality wall putty to customers. APPC was conceptualized. We've gone a long way since then. We have, in fact, been the one-stop-shop for Plaster of Paris (P.O.P.), Wall Putty, One Coat Gypsum Plaster, and Hardware Products during the past 7 years.



PAINTS & CHEMICALS


www.appaints.com

Promo Plus Wall Putty

Promo+ Wall Putty is a white cement based product for covering unevenness and pinholes in plastered surfaces and providing a white, smooth and dry surface for painting . It is suitable for both interior and exterior application.



Product Benefits

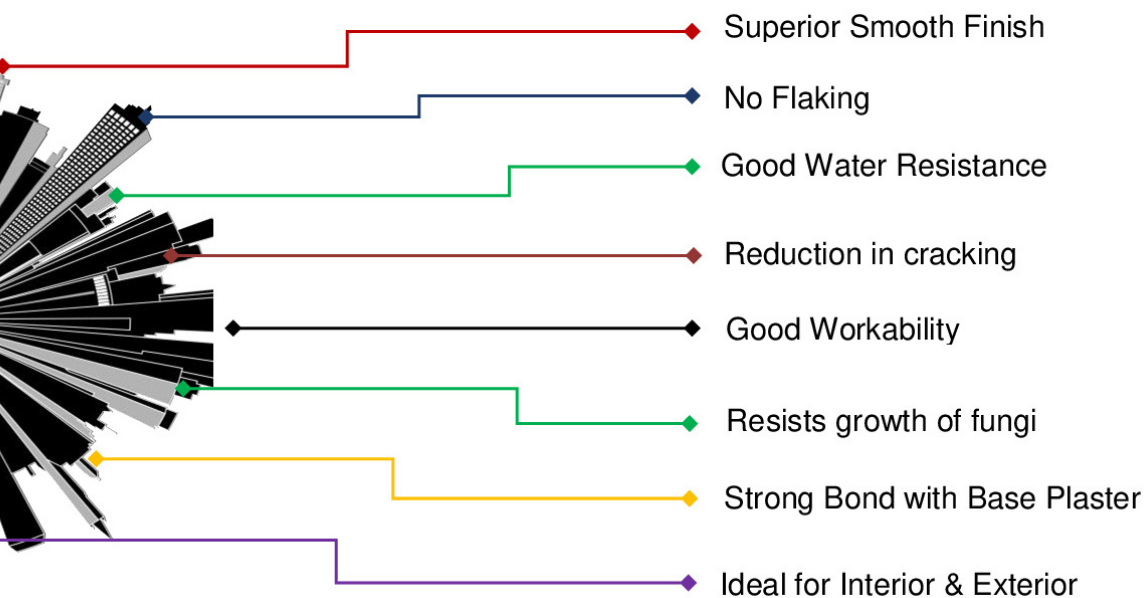

Product Features

AVAILABLE PACKS



1 KG 40 KG

SHADE RANGE

White



COVERAGE

On rough masonry surface by putty knife

2 COATS- 10 sq.ft/Kg*

*However it will depend on nature of substrate and thickness


DRYING TIME TO RECOAT



5-7 HOURS

RECOMMENDED SURFACES

It is suitable for use on all types of external cement plasters/interior walls, asbestos sheets, concrete, and so on.

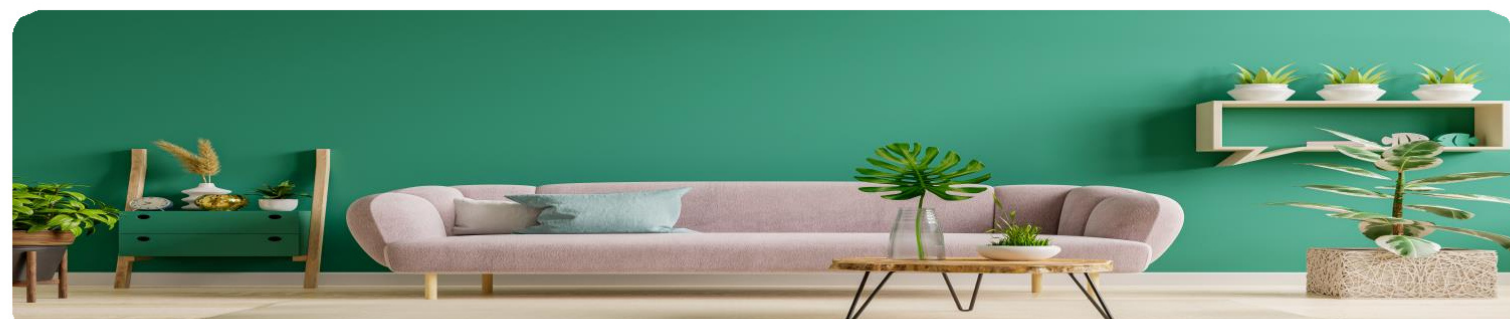

How to Apply

SURFACE PREPARATION

The substrate should be dust-free, grease-free, and devoid of loose objects. Using a suitable amount of clean water, moisten the wall before applying the Promo Plus wall Putty

MIXING OF "PROMO PLUS WALL PUTTY"

To produce a paste, slowly combine Promo Plus Wall Putty with 35-40% clean water. Mix for another 10-15 minutes, or until a homogeneous paste is produced. For proper mixer ideally use a mechanical mixer. Prepare just an amount that may be consumed within 1-2 hours after being mixed with water.

PRE-WETTING OF THE SUBSTRATE

It is very important that the surface be properly wetted before applying the " Promo Plus Wall Putty." During application, the surface should be moist. This results in increased bonding strength, ease of workability, and surface coverage.

APPLICATION

1.After fully mixing "Promo Plus Wall Putty," use a putty blade to apply the first layer uniformly from the bottom to the top of the wet wall surface. This would ensure less waste and a perfect finish.

2.After the initial coat of putty has dried, carefully wipe the surface with a damp sponge or very lightly with the putty blade to remove any loose particles.

3. Allow at least 3 hours for the surface to dry before applying the second coat of putty.After the second layer has dried, erase any sort of markings with a damp sponge or wipe the surface very gently with the putty blade.

4. Allow the surface to cure, ideally overnight / 10-12 hours.

5. The overall thickness of the coatings should be no more than 1.5 mm.

TECHNICAL DETAILS

1.Drying time: Surface dry time 30 min

2.Recoating Time: 5-7 hrs

3.Flash: NA

4.Thining - With 35-40% clean water

5.Stability of thinned paint: To be used within 1-2 Hrs

** The overall thickness of the coatings should be no more than 1.5 mm

PRECAUTION & SAFETY FEATURES

- ✓ Keep out of reach of children
- ✓ Store in dry place
- ✓ If ingested, it might be dangerous. In the event of ingestion, seek medical treatment right away.
- ✓ Apply by using putty knife
- ✓ Wear eye protection when applying. If you come into touch with your eyes, immediately rinse them with lots of water and seek medical attention..
- ✓ When not in use, the bag must be securely closed.
- ✓ To minimise dust inhalation, it is advised that you use an appropriate nose pad when sanding and surface preparation.
- ✓ Do not pour leftover paint down the drain or in water courses.
- ✓ No added Lead, Mercury or Chromium compounds
- ✓ Individuals who are allergic to cement products should exercise caution before using them.
- ✓ Use before 6 month for better results .



PAINTS & CHEMICALS

AP PAINTS AND CHEMICALS ENTERPRISE

Shibpur,Howrah-71102

Email :contactappaints@gmail.com/contact@appaints.com

Website:www.appaints.com